





Subject: Desana Brick Rainscreen System Sub-Framing Components

Dead Load Bracket

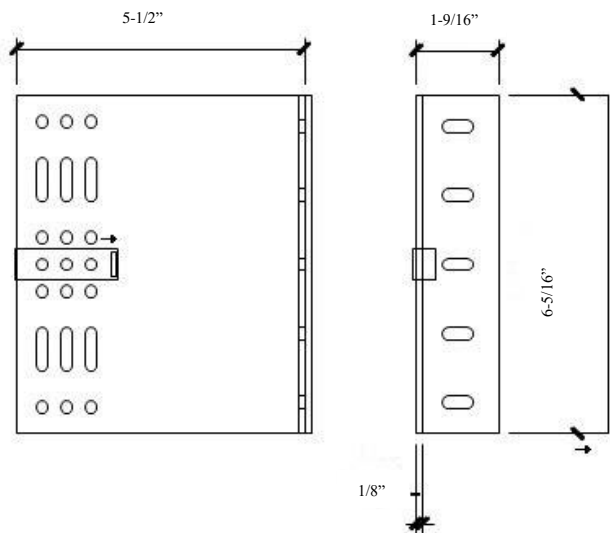

DOUBLE 40mm-160mm *deep*/3mm *thick* bracket
180 *long* – aluminum grade 6063T6.
Bracket depths range from 1.5" – 12".


Transverse or Windload Bracket

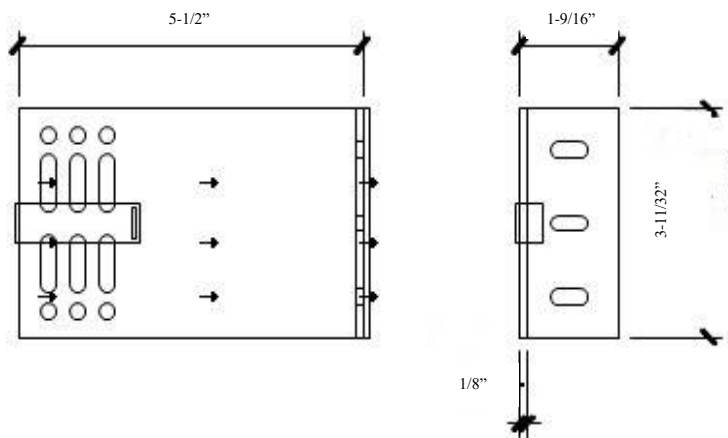


SINGLE 40mm-160mm *deep*/3mm *thick*
bracket 85mm *long* – aluminum grade 6063T6.
Bracket depths range from 1.5" – 12".




Support Profiles




L PROFILE– aluminum grade 6063T6. 2.5 mill - 10’ lengths

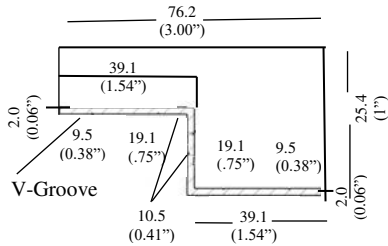


Z CHANNEL – aluminum grade 6063T6. - 10’ lengths

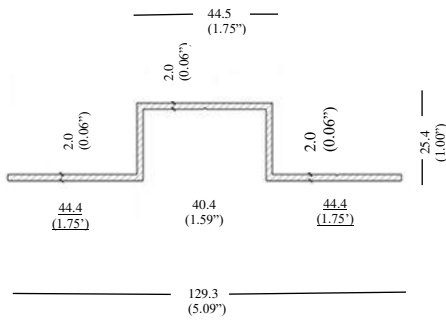

HAT CHANNEL - aluminum grade 6063T6. -10’ lengths



T SECTION – aluminum grade 6063T6 - 10’ lengths

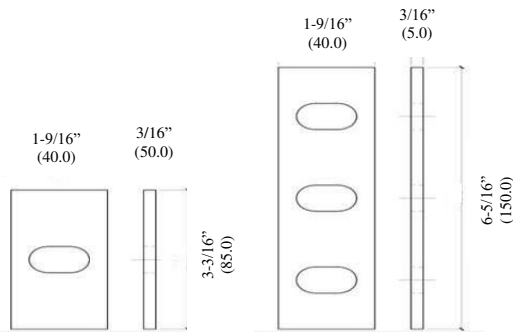

THERMAL ISOLATOR PADS



R1:06/30/2022